


Pipeline System Configuration

Q1, 2018

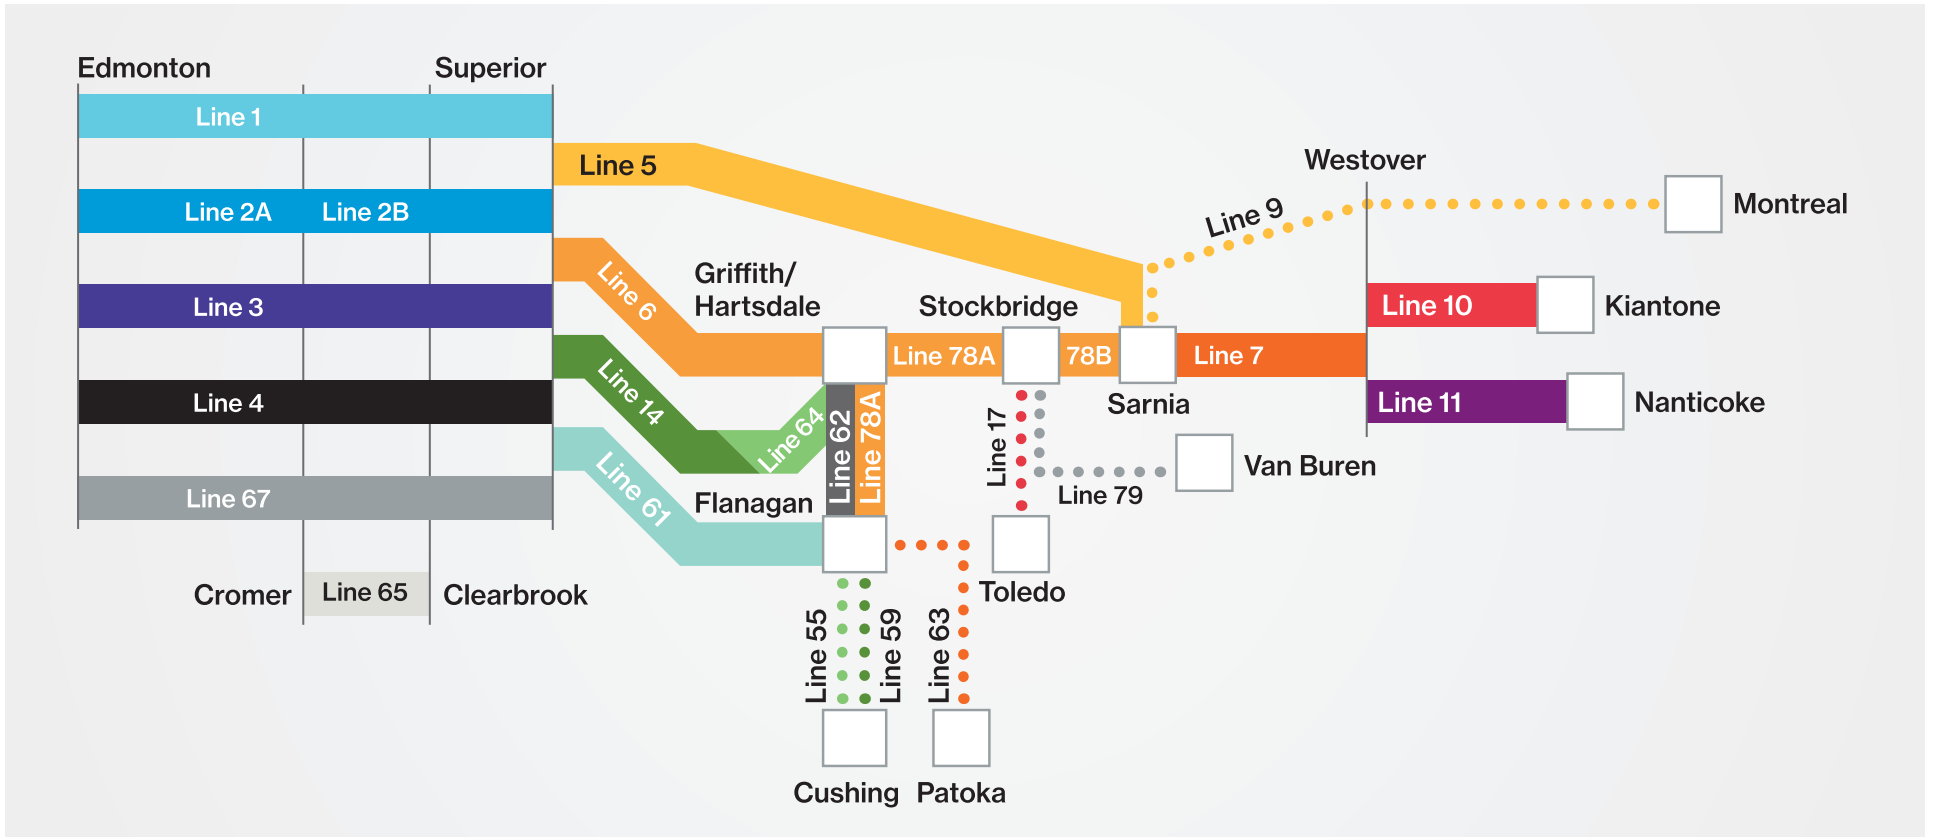

Line 1
37,600 m³/d (237 kbpd)
18"/20" – 1,767 km (1,098 mi)
- NGL
- Refined Products
- Light

Line 2A
70,300 m³/d (442 kbpd)
24" – 966 km (600 mi)
- Condensates
- Light
- Heavy

Line 2B
70,300 m³/d (442 kbpd)
24"/26" – 808 km (502 mi)
(502 mi)
- Light

Line 3
62,000 m³/d (390 kbpd)
34" – 1,767 km (1,098 mi)
- Light
- Medium
- Heavy

Line 4
126,500 m³/d (796 kbpd)
36"/48" – 1,770 km (1,100 mi)
- Heavy
- Medium (Ex-Clearbrook)
- Light (Ex-Clearbrook)

Line 5
85,900 m³/d (540 kbpd)
30" – 1,038 km (645 mi)
- NGL
- Light

Line 6
106,000 m³/d (667 kbpd)
34" – 748 km (465 mi)
- Light
- Medium
- Heavy

Line 7
28,600 m³/d (180 kbpd)
20" – 193 km (120 mi)
- Light
- Medium
- Heavy

Line 78A
90,600 m³/d (570 kbpd)
36" – 425 km (264 mi)
- Light
- Medium
- Heavy

Line 78B
79,500 m³/d (500 kbpd)
30"/36" – 175 km (109 mi)
- Light
- Medium
- Heavy

Line 65
29,500 m³/d (186 kbpd)
20" – 504 km (313 mi)
- Light
- Medium

Line 10
11,800 m³/d (74 kbpd)
12"/20" – 143 km (89 mi)
- Light
- Medium
- Heavy

Line 11
18,600 m³/d (117 kbpd)
16"/20" – 76 km (47 mi)
- Light
- Medium
- Heavy

Line 62
37,400 m³/d (235 kbpd)
22" – 121 km (75 mi)
- Heavy

Line 14/64
54,600 m³/d (343 kbpd)
24" – 784 km (487 mi)
- Light
- Medium

Line 61
158,300 m³/d (996 kbpd)
42" – 744 km (462 mi)
- Light
- Medium
- Heavy

Line 67
127,200 m³/d (800 kbpd)
36" – 1,790 km (1,112 mi)
- Heavy

Not part of the Enbridge Mainline System

Line 9
47,700 m³/d (300 kbpd)
30" – 832 km (517 mi)
- Light
- Medium
- Heavy

Line 17
16,000 m³/d (100 kbpd)
16" – 142 km (88 mi)
- Light
- Medium
- Heavy

Line 55
30,700 m³/d (193 kbpd)
22"/24" – 938 km (583 mi)
- Light
- Medium
- Heavy

Line 59
93,000 m³/d (585 kbpd)
36" – 954 km (593 mi)
- Light
- Medium
- Heavy

Line 79
12,700 m³/d (80 kbpd)
20"/16" – 98 km (61 mi)
- Light
- Medium
- Heavy

Line 63
47,700 m³/d (300 kbpd)
24" – 270 km (168 mi)
- Light
- Medium
- Heavy